



Luci Series **Silver**

185 fixed

Benefits



- + Perfectly suitable for environments where a true colour is vital (CRI 83)
- + White diffuser when light is off
- + Passive heat sink, no moving parts
- + Fits in standard 185-205 mm apertures
- + Low recess depth of 160 mm
- + Homogeneous light beam
- + Waterproof front
- + Incl. TCI driver
- + Optional DALI or 0-10V dimmable driver
- + Flexible Lumen packages selectable by changing driver settings
- + Warranty 5 years

Features

Colour	Matte white RAL 9016
Input voltage	TCI Power supply 110 - 240 V
Frequency	50 / 60 Hz
Light source wattage	22 W / 34 W / 46 W
Lumen output	22 W - up to 2400 lm 34 W - up to 3650 lm 46 W - up to 4500 lm
Light source efficacy	Up to 114 lm/W
Color rendering index (CRI)	83
Beam angle	80°
Material	Diecast aluminium
Protection against water	IP20/IP44
Protection against shock	IK02
Safety class	II
Powerfactor (P _f)	22 W - 0.95 34 W - 0.95 46 W - 0.98
Inrush current	22 W - 5 A - 50 μS 34 W - 5 A - 50 μS 46 W - 10 A - 200 μS
B16-A fuse	22 W - 50 pcs 34 W - 50 pcs 46 W - 30 pcs
Operating temperature	-20 °C to +45 °C
Safety norms	EN60598 / EN62031 / EN62471
EMC norms	EN55015
Weight single unit	1576 gr
Expected lifetime at 25 °C (L70)	>80.000 hrs



Dimensions

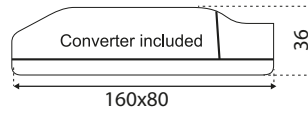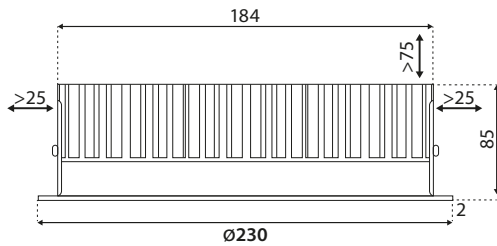

185 - 205 mm (hard mineral plates)
185 mm (soft mineral plates)

Ordering information

Article number	Nomenclature	Wattage	Efficacy	Lumen	CCT Output	Beam Angle	CRI
Luci Series Silver 185 fixed							
16751	Silver 185 fixed 3000K - FLO 11/22W - White - no dim	22 W	109 Lm/W	2400 lm	3000K	80°	83
16752	Silver 185 fixed 4000K - FLO 11/22W - White - no dim	22 W	114 Lm/W	2500 lm	4000K	80°	83
15432	Silver 185 fixed 3000K - FLO 22/34W - White - no dim	34 W	103 lm/W	3500 lm	3000K	80°	83
15433	Silver 185 fixed 4000K - FLO 22/34W - White - no dim	34 W	107 lm/W	3650 lm	4000K	80°	83
15434	Silver 185 fixed 3000K - FLO 34/46W - White - no dim	46 W	95 lm/W	4350 lm	3000K	80°	83
15435	Silver 185 fixed 4000K - FLO 34/46W - White - no dim	46 W	98 lm/W	4500 lm	4000K	80°	83

Driver settings

Lamp Wattage	Lamp Current	Lumen Output		Efficacy	
		3000K	4000K	3000K	4000K
9W	350 mA	1250 lm	1300 lm	139 lm/W	144 lm/W
13 W	500 mA	1750 lm	1800 lm	135 lm/W	140 lm/W
18 W	700 mA	2400 lm	2500 lm	133 lm/W	138 lm/W
24 W	900 mA	3000 lm	3150 lm	125 lm/W	126 lm/W
29 W	1050 mA	3500 lm	3650 lm	120 lm/W	123 lm/W
34 W	1200 mA	3850 lm	4000 lm	115 lm/W	119 lm/W
38 W	1400 mA	4350 lm	4500 lm	113 lm/W	118 lm/W

Accessories

Article number	Nomenclature
14239	Silver - Adapter ring 290x185



Adapter Ring

All product, product specifications and data are subject to change without notice to improve reliability, function, design or otherwise. Photos and pictures are for illustration purpose only.

Bever_SPEC_Luci Series Silver Pendant_2017-06-28