



## Luci Series **Silver**

90 directional

### Features



Colour	Matte white RAL 9016
Input voltage	TCI driver 110-240 V
Frequency	50/60 Hz
Light source wattage	20 W
Lumen output	Up to 1500 lm
Light source efficacy	Up to 77 lm/W
Colour rendering index (CRI)	Up to 93
Beam angle	60°
Material	Diecast aluminium
Protection against water	IP20
Protection against shock	IK02
Safety class	II
Powerfactor (Pf)	0,95
Inrush current	5 A 50 μS
B-16A fuse	50 pcs
Operating temperature	-20 °C to +45 °C
Safety norms	EN60598 / EN62031 / EN62471
EMC norms	EN55015
Weight single unit	496 gr
Expected lifetime at 25°C (L70)	>160.000 hrs

### Benefits

- + Perfectly suitable for environments where a true colour is vital (CRI 93)
- + White diffuser when light is off
- + Passive heat sink, no moving parts
- + Waterproof front
- + Incl. TCI driver
- + Optional DALI or 0-10 V dimmable driver
- + Flexible Lumen packages selectable by changing driver settings
- + Warranty 5 years



Dimensions

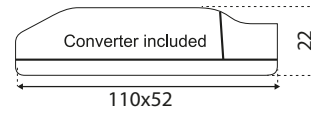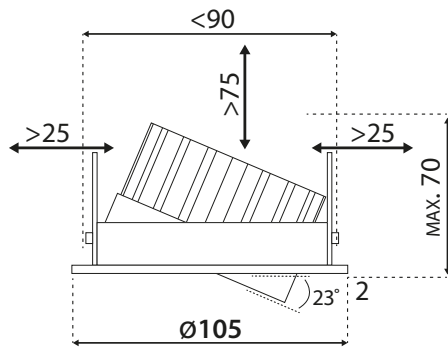

Ordering information

Article number	Nomenclature	Wattage	Efficacy	Lumen Output	CCT	Beam Angle	CRI
<b>Luci Series Silver 90 directional</b>							
16753	Silver 90 directional 2700K - FLO 10/20W - White - no dim	20 W	51 lm/W	1000 lm	2700K	60°	93
16754	Silver 90 directional 3000K - FLO 10/20W - White - do dim	20 W	64 lm/W	1250 lm	3000K	60°	83
16755	Silver 90 directional 4000K - FLO 10/20W - White - no dim	20 W	77 lm/W	1500 lm	4000K	60°	83

Driver settings

Lamp Wattage	Lamp Current	Lumen Output			Efficacy		
		2700K	3000K	4000K	2700K	3000K	4000K
10,2 W	350 mA	525 lm	675 lm	675 lm	51 lm/W	66 lm/W	78 lm/W
14,1 W	500 mA	715 lm	900 lm	1075 lm	51 lm/W	64 lm/W	77 lm/W
19,5 W	700 mA	1000 lm	1250 lm	1500 lm	51 lm/W	64 lm/W	77 lm/W

All product, product specifications and data are subject to change without notice to improve reliability, function, design or otherwise. Photos and pictures are for illustration purpose only.