



I-Catcher

Time Temperature Module


Features

Power	< 1W
Operating Temperature	-20 °C to +50 °C
Storage Temperature	-40 °C to +85 °C
Housing Material	White UV stabilized thermoplastic
IP rating	Fully coated, moisture protected
Cable Length	7M
Installation	1.5 m above ground level
Max pole diameter	52 mm (pole mounting bracket not included)

Benefits

- + Easy to connect to all Sign Controllers
- + High reflection
- + Low thermal conductivity
- + Accurate, reliable, excellent performance
- + Resistant to all weather conditions
- + Minimal maintenance
- + Selection between time and/or temperature
- + Automatically adjust to summer/winter time
- + Fully configurable with I-Config
- + Time-Temperature display available on request

Dimensions

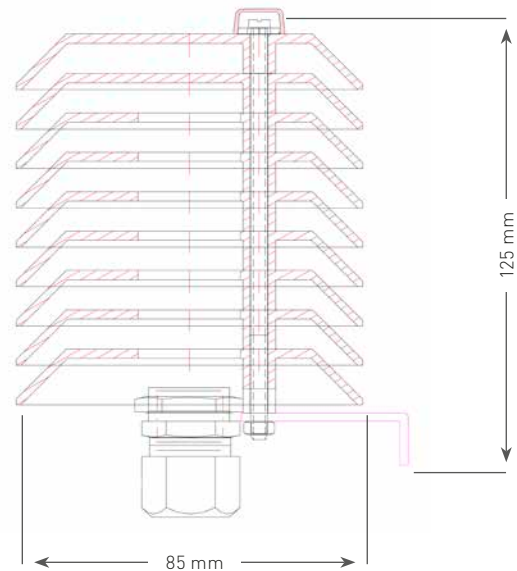

Ordering Information

Article number	Nomenclature
16897	Time and Temperature module for Signcontroller