



Luci Series **Silver**

75 fixed

Benefits

- + Perfectly suitable for environments where a true colour is vital (CRI 93)
- + White diffuser when light is off
- + Passive heat sink, no moving parts
- + Waterproof front
- + Incl. TCI driver
- + Optional DALI or 0-10V dimmable driver
- + Flexible lumen packages selectable by changing driver settings
- + Warranty 5 years


Features

Colour	Matte white RAL 9016
Input voltage	TCI driver 110-240V
Frequency	50 / 60 Hz
Light source wattage	20 W
Lumen output	Up to 1500 lm
Light source efficacy	Up to 77 lm/W
Colour rendering index (CRI)	Up to 93
Beam angle	60°
Material	Diecast aluminium
Protection against water	IP20/IP44
Protection against shock	IK02
Safety class	II
Powerfactor (Pf)	0,95
Inrush current	5 A 50 μ S
B-16A fuse	50 pcs
Operating temperature	-20 °C to +45 °C
Safety norms	EN60598 / EN62031 / EN62471
EMC norms	EN55015
Weight single unit	441 gr
Expected lifetime at 25 °C (L70)	>160.000 hrs



Bever_SPEC_Luci Series Silver 75 Fixed_2017-08-09

Dimensions

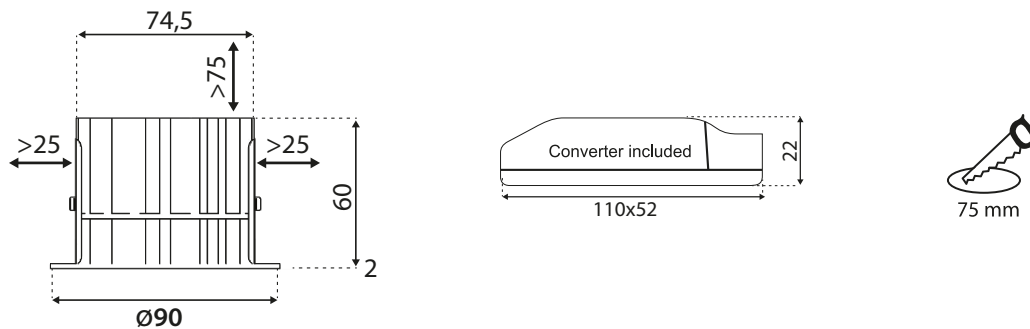

Ordering information

Article number	Nomenclature	Wattage	Efficacy	Lumen Output	CCT	Beam Angle	CRI
Luci Series Silver 75 fixed							
16756	Silver 75 fixed 2700K - FLO 10/20W - White - no dim	20 W	51 lm/W	1000 lm	2700K	60°	93
16757	Silver 75 fixed 3000K - FLO 10/20W - White - no dim	20 W	64 lm/W	1250 lm	3000K	60°	80
16758	Silver 75 fixed 4000K - FLO 10/20W - White - no dim	20 W	72 lm/W	1500 lm	4000K	60°	80

Driver settings

Lamp Wattage	Lamp Current	Lumen Output			Efficacy		
		2700K	3000K	4000K	2700K	3000K	4000K
10,2 W	350 mA	525 lm	675 lm	675 lm	51 lm/W	66 lm/W	78 lm/W
14,1 W	500 mA	715 lm	900 lm	1075 lm	51 lm/W	64 lm/W	77 lm/W
19,5 W	700 mA	1000 lm	1250 lm	1500 lm	51 lm/W	64 lm/W	77 lm/W