



Luci Series **Silver**

75 Re-Action fixed

Features


Colour	Matte white RAL 9016
Input voltage	TCI driver 110 - 240 V
Frequency	50 / 60 Hz
Light source wattage	8 W
Lumen output	600 lm
Light source efficacy	75 lm/W
Colour rendering index (CRI)	83
Beam angle	24° / 60°
Material	Diecast aluminium
Protection against water	IP20
Protection against shock	IK02
Safety class	II
Powerfactor (Pf)	0.6
Inrush current	20 A 170 μS
B-16A fuse	50 pcs
Operating temperature	-20 °C to +45 °C
Safety norms	EN60598 / EN62031 / EN62471
EMC norms	EN55015
Weight single unit	264 gr
Expected lifetime at 25 °C (L70)	>280.000 hrs

Benefits

- + Integrated motion sensor
- + Light turns off after 4 minutes no motion
- + Perfectly suitable for environments where a true colour is vital (CRI 83).
- + White diffuser when light is off
- + Passive heat sink, no moving parts
- + Incl. TCI driver
- + Warranty 5 years



Dimensions

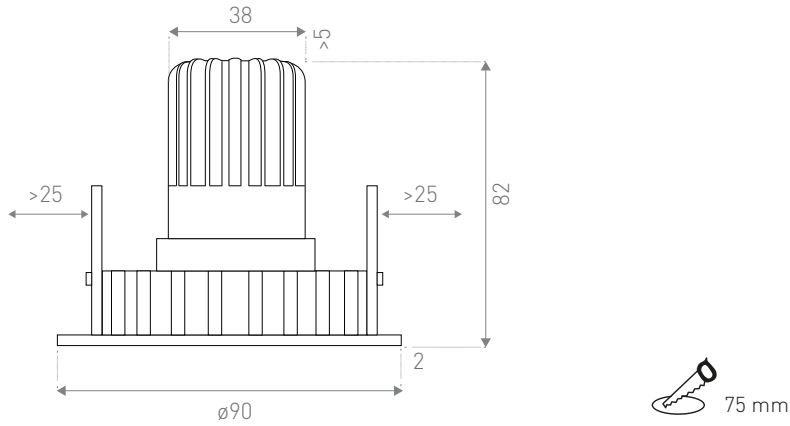

Ordering information

Article number	Nomenclature	Wattage	Efficacy	Lumen Output	CCT	Beam Angle	CRI
Luci Series Re-Action Silver 75 fixed							
16128	Re-Action Silver 75 fixed 3000K - spot - white - no dim	8 W	75 lm/W	600 lm	3000K	24°	83
16130	Re-Action Silver 75 fixed 4000K - spot - white - no dim	8 W	75 lm/W	600 lm	4000K	24°	83
16129	Re-Action Silver 75 fixed 3000K - flood - white - no dim	8 W	75 lm/W	600 lm	3000K	60°	83
16131	Re-Action Silver 75 fixed 4000K - flood - white - no dim	8 W	75 lm/W	600 lm	4000K	60°	83

All product, product specifications and data are subject to change without notice to improve reliability, function, design or otherwise. Photos and pictures are for illustration purpose only.

Bever_SPEC_Luci Series Silver 75 ReAction Fixed_2017-08-09