



Luci Series **Silver** Circular 235

Features


Colour	Matte white RAL 9019
Input voltage	220-240V
Frequency	50 / 60 Hz
Light source wattage	12 W / 20 W
Light source efficacy	up to 118 lm/W
Colour rendering index (CRI)	83
Beam angle	60°
Material	Diecast aluminium
Protection against water	IP20
Protection against shock	IK02
Safety class	II
Powerfactor (Pf)	0.98
Operating temperature	-20 °C to + 45 °C
Safety norms	EN60598 / EN62031 / EN62471
EMC norms	EN55015
Weight single unit	2.432 gr
Expected lifetime at 25 °C (L70)	80.000 hrs

Benefits

- + Led luminaire for surface mounting on ceilings
- + Perfectly suitable for environments where a true colour is vital (CRI 83)
- + White diffuser when light is off
- + Passive heat sink, no moving parts
- + Homogeneous light beam
- + Dimmable with most phase cut 230Vac, dedicated led dimmers
- + Warranty 5 years



Dimensions

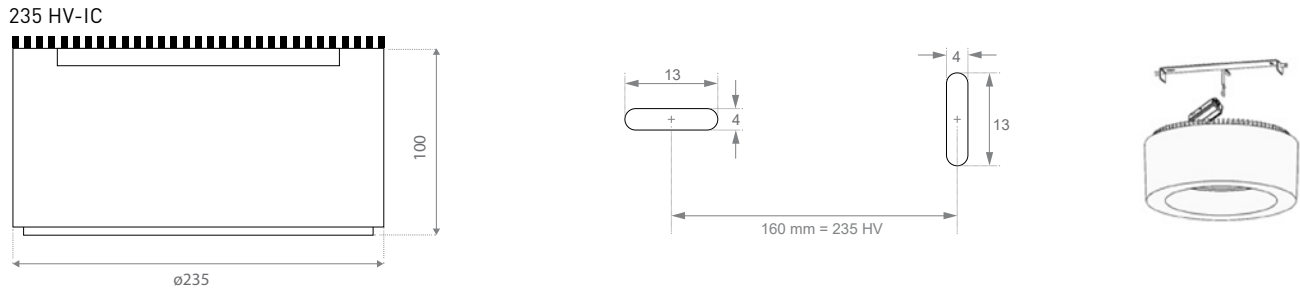

Ordering information

Article number	Nomenclature	Wattage (up-to)	Lumen / Watt	Lumen Output	CCT	Beam Angle	CRI
Luci Series Silver Circular							
16986	Silver Circular 235 HV fixed 3000K - 12 Watt - White - dim	12 W	109 lm/W	1250 lm	3000K	60°	83
16987	Silver Circular 235 HV fixed 4000K - 12 Watt - White - dim	12 W	118 lm/W	1250 lm	4000K	60°	83
16988	Silver Circular 235 HV fixed 3000K - 20 Watt - White - dim	20 W	104 lm/W	2000 lm	3000K	60°	83
16989	Silver Circular 235 HV fixed 4000K - 20 Watt - White - dim	20 W	113 lm/W	2000 lm	4000K	60°	83

All product, product specifications and data are subject to change without notice to improve reliability, function, design or otherwise. Photos and pictures are for illustration purpose only.

Bever_SPEC_SHOP_Luci Series Silver Circular_2018-01-24